


## Specifications parameter




Model: XLX-5050L12V30RGB10

Input voltage	12V DC
Beam angle	120°
Colour	R/G/B
Power	7W/m
Current	RGB 0.6A/m
Brightness	RGB 260lm/m
Length/reel	5m
Cut length	100mm/unit
IP grade	IP20/IP55/IP65/IP67/IP68
Operating Temperature	-20°C +45°C
Storage temperature	0°C +60°C
Environment humidity	40~70% RH


## Various waterproof solution



IP20  
No waterproof  
Dry location




IP55  
Silicone coating  
Wet location



IP65  
Silicon tube  
Wet location




IP67  
Silicone extrusion,  
empty inside  
Wet location  
short time under water



IP68  
Silicone extrusion,  
solid inside  
Wet location  
long time under water

## Physical specifications

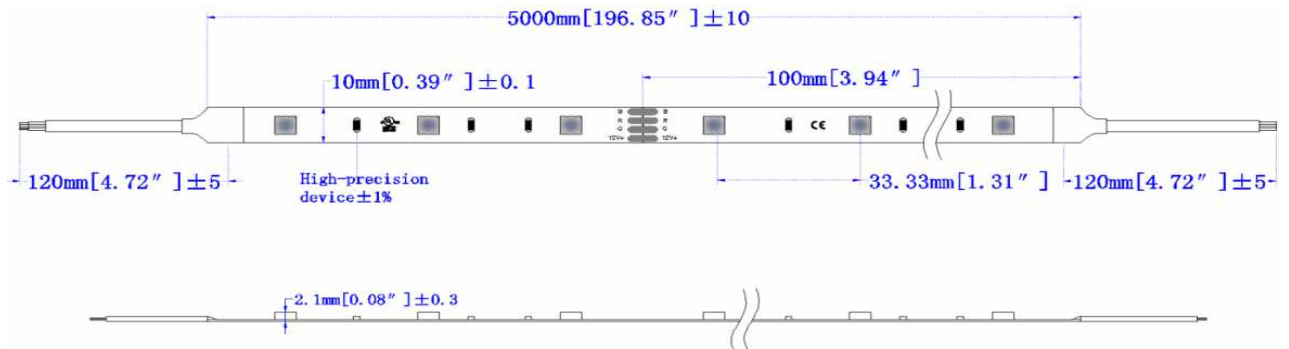

## Light distribution curve

