




## Specifications parameter

Model: XLX-FS1009.5A624-0	
Input voltage	12V DC
Power	14/12W/m
LED type	SMD6060
CCT	<span style="color:red">R</span> <span style="color:blue">B</span> <span style="color:green">G</span> <span style="color:orange">A</span> <span style="color:red">O</span> <span style="color:magenta">P</span> <span style="color:yellow">WW</span> <span style="color:yellow">NW</span> <span style="color:lightblue">CW</span>
Lumens(lm/m)	> 1000lm
CRI	>70; >80
LED Qty/m	24/18LEDs
Beam angle	160°
IP grade	IP65
Size	W9.5*H3.0mm
Working temperature	-20°C~55°C


## Various waterproof solution



## Physical specifications

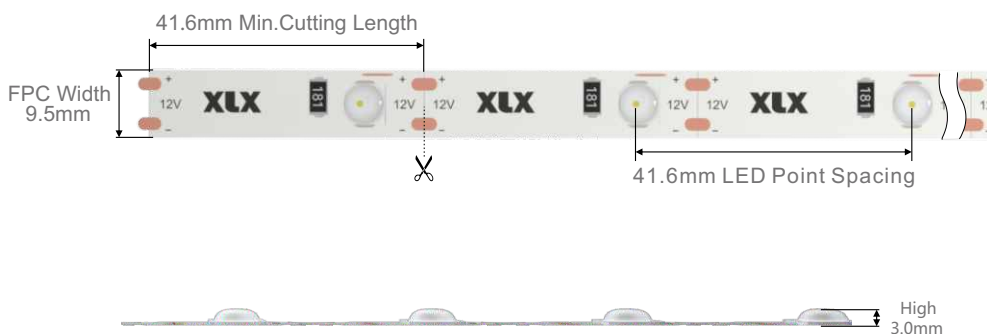

## Light distribution curve

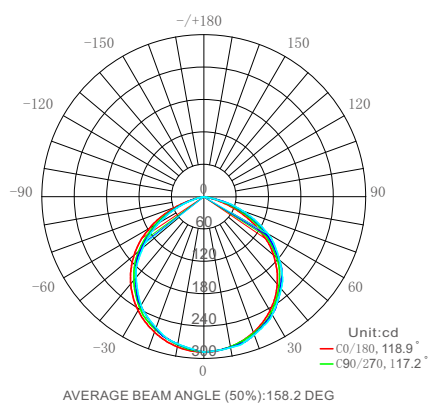

Center height(m)	Center illumination(lux)	Average illuminance(lux)	Beam angle	Diameter
1.0	122.4;612.4lx			269.01cm
2.0	34.71;138.1lx			538.01cm
3.0	14.32;65.60lx			807.02cm
4.0	9.146;39.82lx			1076.03cm
5.0	4.874;21.25lx			1345.04cm
Height	Eavg,Emax		Beam angle	Diameter